

DENALI HARDWOOD FLOORS

UNFINISHED ENGINEERED FLOORINGS 2025 CATALOG

www.denalihardwoodfloors.com

# Unfinished Engineered Floorings

Offers unlimited versatility by allowing you to customize your floor

3-4	SPECIES & GRADES
5-8	STRUCTURE
9-18	PRIME & SMOKED
19-24	NATURE & NATURE+
25-26	CERTIFICATIONS & W

## CONTENTS

VARRANTY

## **SPECIES**



#### WHITE OAK (AMERICAN/EUROPREAN)

RED OAK

HICKORY

HARD MAPLE

## GRADES



PRIME | Clean Grade

Prime grading provides an overall clean and uniform appearance, though it's not completely flawless. Expect minimal pin knots and slight color variation, offering a refined yet natural look. This grade is ideal for spaces where a sleek, polished aesthetic is desired without sacrificing authenticity.

**NATURE** | Light Character Nature grading balances character and simplicity. With some knots and natural variations, it introduces warmth and charm while maintaining versatility. This grade complements a wide range of interior styles, from modern to traditional and everything in between.


NATURE+ | More Character Nature+ grading is full of personality and rich character. With more pronounced knots and textures, it brings depth and a unique aesthetic to any space. Its bold look works seamlessly in diverse design styles, offering endless creative possibilities.

4


## STRUCTURE




All products are square-edge, with custom beveling options available.



Thickness: 3/4" or 19mm Wear Layer: 4mm



Thickness: 3/4" or 18mm Wear Layer: 6mm



#### Thickness: 5/8″or 15mm Wear Layer: 4mm



Thickness: 1/2"or 12mm Wear Layer: 3mm

6

## STRUCTURE

#### Eucalyptus Plywood Core

Sustainable Resource & Environmental Friendliness: Reaching maturity in just 5-7 years, making it an excellent renewable resourcey.

Strength and Stability:


High density and hardness, properly treated, it ensures dimensional stability.

Insect Resistance: Natural pest-deterring compounds and dense structure protect against termites and wood-boring insects, improving durability.

Adhesive Compatibility:

Eucalyptus wood bonds well with adhesives and finishes, ensuring strong connections between layers and durability over time.



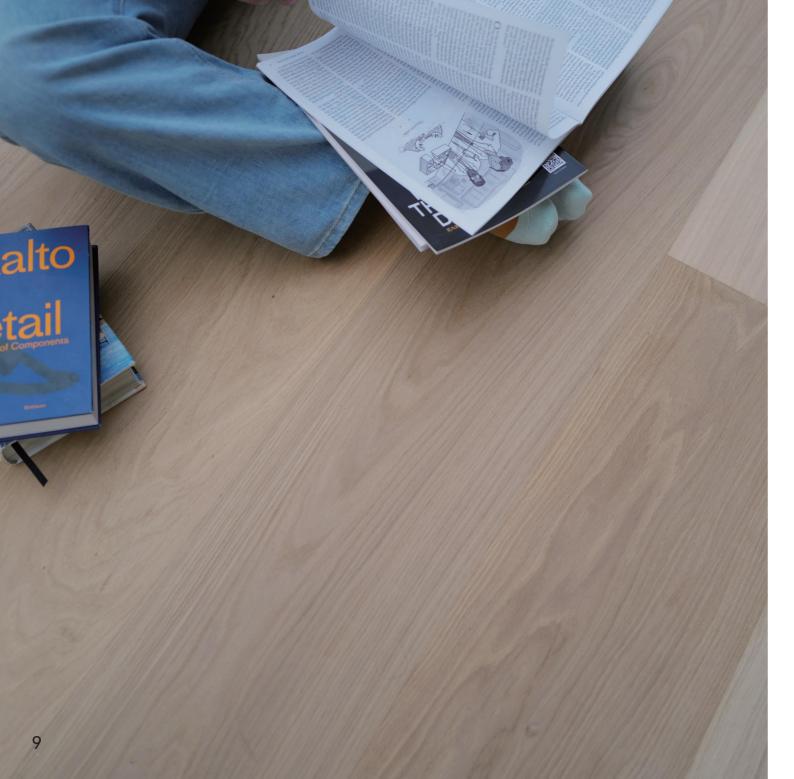



PRIME | Clean Grade



### SMOKED | Nature+ Grade

# PRIME



EUROPEAN WHITE OAK

RED OAK

Species	Thickness	Width
European White Oak	5/8"	6"
		7-1/2"
		7-1/2"
		8-5/8"
		8-5/8"
		9-1/2"
		9-1/2"
	3/4"	6"
		7-1/2"
		7-1/2"
		8-5/8"
Red Oak	1/2"	3-1/4"
	5/8"	5"

## PRIME PRODUCT LIST

Length	Wear Layer	SF/CTN
RL, UP TO 75"	4mm	24.93
RL, UP TO 75"	4mm	23.32
RL, UP TO 67"	4mm	27.00
RL, UP TO 87"	4mm	31.26
RL, UP TO 95"	4mm	34.10
RL, UP TO 75"	4mm	29.71
RL, UP TO 79"	4mm	29.97
RL, UP TO 75"	4mm	18.70
RL, UP TO 67"	4mm	27.00
RL, UP TO 67"	4mm	22.73
RL, UP TO 75"	4mm	23.32
RL, UP TO 82.7"	3mm	28.14
RL, UP TO 86.8"	4mm	30.07



## PRIME European White Oak

Prime grade engineered hardwood indicates product that is mostly free of imperfections such as knots and mineral streaks, contributing to an overall clean, light, and consistent appearance.




# SMOKED

#### NATURE+




Smoked hardwood flooring undergoes an ammonia vapor treatment that reacts with the wood's natural tannins, creating deep, rich tones and unique grain patterns without the use of surface stains. This process enhances the wood's natural beauty, with color penetrating deeply to make scratches less visible over time, adding a sophisticated, timeless aesthetic to any space.

Species	Thickness	Width	
European White Oak	5/8"	7-1/2"	
		9-1/2"	
	3/4"	9-1/2"	

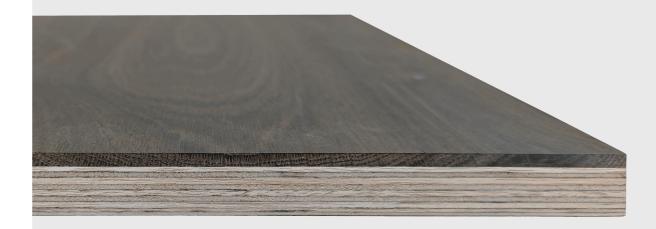

## SMOKED PRODUCT LIST


Length	Wear Layer	SF/CTN
RL, UP TO 75"	4mm	23.32
RL, UP TO 87"	4mm	34.10
RL, UP TO 87"	4mm	22.73

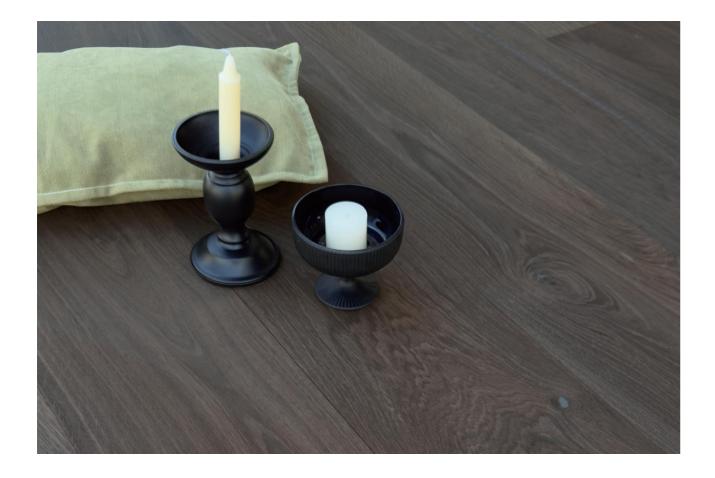

## SMOKED European White Oak

Smoked floors exude timeless elegance and rustic charm, blending old-world character with modern sophistication. Their rich tones and subtle color variations create a sense of history while adding beauty to any space.



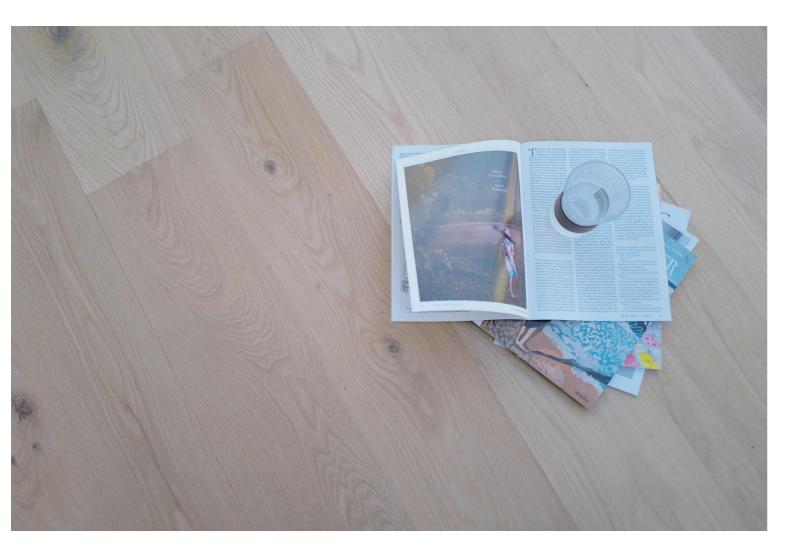



Nature | Light Character



Nature+ | More Character

### NATURE PRODUCT LIST

Species	Thickness	Width	Length	Wear Layer	SF/CTN
European White Oak	3/4"	7-1/2"	RL, UP TO 67"	6mm	18
		7-1/2"	RL, UP TO 75"	6mm	15.4
American White Oak	5/8"	6"	RL, UP TO 75"	4mm	28.43
Hickory	5/8"	6"	RL, UP TO 75"	4mm	28.43
Hard Maple	5/8"	6"	RL, UP TO 75"	4mm	28.43



EUROPEAN WHITE OAK



AMERICAN WHITE OAK

HICKORY

#### HARD MAPLE

### NATURE+ PRODUCT LIST


Species	Thickness	Width	Length	Wear Layer	SF/CTN
European White Oak	3/4"	8-5/8"	RL, UP TO 87"	6mm	20.84







6mm Wear Layer

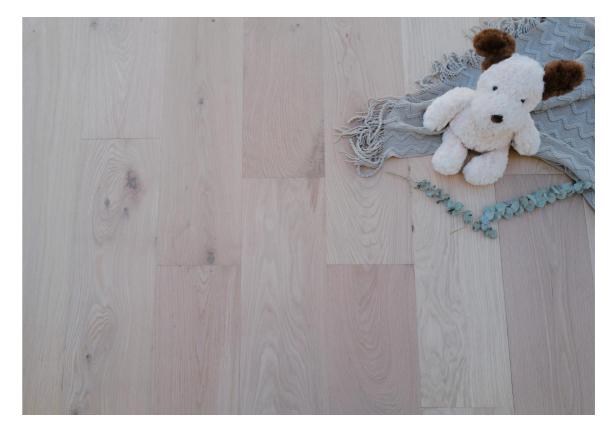

# **CERTIFICATIONS & WARRANTY**



Carb phase 2 compliant. Being CARB compliant indicates that we adhere to California's air quality and contaminant standards. This product poses no health risks. California enforces some of the strictest regulations in the United States concerning hazardous substances and air quality in consumer products.



NWFA. We take pride in being members of the National Wood Flooring Association, an international non-profit trade association that represents all aspects of the hardwood flooring industry.



Legally Sourced & Sustainably Managed - Our hardwood flooring is sourced in full compliance with U.S. laws, including the Lacey Act, ensuring responsible and legal harvesting practices.



Lifetime structural warranty. residential limited warranty is given to the original retail purchaser (end-user) of the product.



DENALI HARDWOOD FLOORS



www.denalihardwoodfloors.com



26